

DO-35 ZENER DIODES


VOLTAGE RANGE: *\$---&\$ \$V PEAK PULSE POWER: 500mW

FEATURES

Š[, :^}^! ã {]^âæ}&^
 Š[, !^*~|æcá[] -æ&c[!
 Ō|æ••]æ••âçæc^â b~ }&cá[}
 Pã* @ c^ {]^!æc~!^ • [[â^!ã] * *~æ!æ}c^ââKĠĠ€ DF€ÛÛJÉÍ { { |^æâ
 |^} *c@ æc í |à• c^}•ã[}

MECHANICAL DATA

Ōæ•^KÖUEHÍÇŌŠCEÛÛD { [[â^â *|æ•• à[â^
 V^! { ã}æ|•K Ú|æc^â æçãæ| |^æâ•é • [[â^!æâ|^]^! TŪŠĚÛVŌ Ő Ī í ĚĚ
 { ^c@ [â GĠĠ
 Ú[[æ!âc^K Ō[[[! ãæ}â â^} [c^• &æc@ [â^ ^}â
 T [~ }cá} * Ú [•cá[]K CE } ^

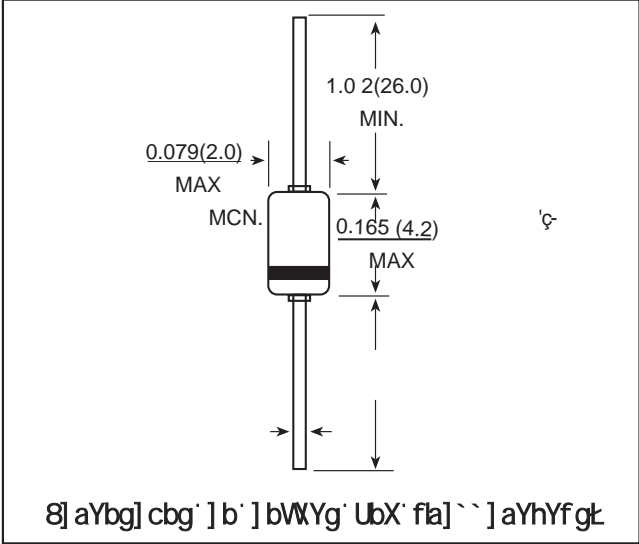

MAXIMUM RATINGS AND CHARACTERISTICS

Üæcá} *• æc Ġ í Ō æ { àâ^}c c^ {]^!æc~!^ ~ }|^•• [c@^! , ã•^ •]^ââ-ã^â

DufUaYhYfg	ÜYŤÓUŠŮ	VALUE	WPQVŮ
Ú[, ^! Ōã••ã]æcá[] æc Væ { àMGĠ ŌÇP [c^ FD	Ú _{ct}	í€€	{ Y
R~ }&cá[] V^ {]^!æc~!^	V _R	G€€	
Úc[!æ^ V^ {]^!æc~!^ Üæ} *^	V _{uv0}	ĚĪ í c[Ě G€€	
V@^! { æ !^•ãæ} &^ b~ }&cá[] æ { àâ^}cÇP [c^ FD	Ü _{<RDE}	€ĤH	S! { Y
Ø[! , æ!â ç [cæ^ æc Q0MG€€ { CE	X ₀	FĚF	X

P [c^ FK Xæ|ã] : [çãâ^â c@æc |^æâ• æc æ ãã•cæ} &^ [- F€ { { -! [{ &æ•^ æ!^ \^]c æc æ { àâ^}c c^ {]^!æc~!^

