


PLASTIC SILICON RECTIFIERS

)(\$ 7 8 5 (6
 V@^]|æ•cá&]æ&\æ*^ &æ:íá• W)á^! , íáç• Šæà[íæc[í^
 Ø|æ { { æà|íç^ Ô|æ••í&æcá [} J I XÉ€
 Pí* @ •~! *^ &~!!^ } c &æ] æà|íç^
 FÉÍ€ []^! æcá [} æc VŠMÍ€ , íç@ [] c@^! { æ|!~ } æ , æ^
 Š [, !^ç^!•^ |^æ\æ*^
 Pí* @ ~ [! , æ:á •~! *^ &~!!^ } c &æ] æà|íç^
 Ô|æ••Á]æ••íçæç^áÁ~ } &cá [}

O (& + \$ 1 , & \$ / \$ 7 \$
 Ôæ••KRÒÖÔ ÖUÉFÍ { [|á^á] |æ•cá& à [á^
 Ú [|æ:íç^ KÔ [[! : àæ } á á^] [c^• &æc@ [á^ ^] á
 T [~ } cá } * Ú [•íçá [} KCE] ^
 Y^á* @ cK€ÉFÍ [~] &^É€ÉHH * íæ {

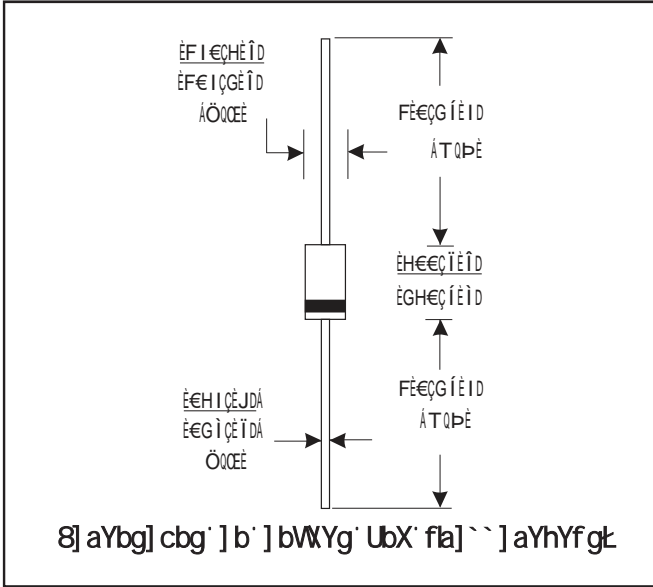

MAXIMUM RATINGS AND CHARACTERISTICS

ÓÁG Í » ÔÁÇE { àá^ } cÁV^ {]^! æ~! ^Áç~ } |^••Á [c@^! , á•^Á] [c^áD

Úæ:æ { ^c^! }	Û^ { à []• }	Fp	Fp	Fp	Fp	Fp	Fp	Fp	Fp	Fp	Fp	W)á•
Tæðá { ~ { Ü^&~!!^ } c Ú^æ\ Ü^ç^!•^ X [çæ*^Á	XÜÜT	Í€	F€€	G€€	H€€	I€€	Í€€	î€€	ì€€	F€€€	X [ç•	
Tæðá { ~ { ÜTÜ X [çæ*^	XÜTÜ	HÍ	í€	FÍ€	GÍ€	Gì€	Hí€	IG€	íí€	í€€	X [ç•	
Tæðá { ~ { ÖÖ Ó [&í } * X [çæ*^	Xóó	Í€	F€€	G€€	H€€	I€€	Í€€	î€€	ì€€	F€€€	X [ç•	
Tæðá { ~ { æç^!æ*^ Ø [! , æ:á Ü^&ç^!á Ô~!!^ } Á É€HÍ ÍÁÇJÉÍ { { D ^æá ^ } * c@ æVCEMÍ Í	QçEXO	FÉÍ										ÇE { }•
Ú^æ\ Ø [! , æ:á Ü~! *^ Ô~!!^ } çJÉH { •D@æ •í } ^É , æç^ Á &~]^! á [] [•^á [] :æç^! [æá ÇRÒÖÔÔ { ^c@ [áD	QøUT	í€€										ÇE { }•
Tæðá { ~ { Q } •çæ } çæ^ [~ • Ø [! , æ:á X [çæ*^ æc FÉÍ ÇE	XØÇE f &	X [ç• Tæðá { ~ { ÁÜ^ç^!•^ &~!!^ } çæç^!æç^!á ÖÖÁÓ [&í } * ÁX [çæ*^ VCBMG Í • ÖÜÉÇM F€										
		í€€										
V^] í&æ] V@^! { æ] Ü^•íçæ } &^çP [c^ GD	Ü _{RE}	í€€										ÔD Y
V^] í&æ] R~ } &cá [] Ôæ] æ&íçæ } &^çP [c^ FD	Ô _R	í€€										ÚØÇE
	V _R	ÉÍÍ c [ÉFÍ€										Ô
	V _{UV0}											

FÉT^æ•~! ^ááæçÍFTP : Áæ] áÁæ]] íáá^! ^ç^!•^ Áç [|çæ*^ Á - Á Í€XÍÖÈÖÈ
 GÉV@^! { æ] ÁÜ^•íçæ } &^Á- [[ÁR~ } &cá [] Ác [ÁÇE { àá^ } çÉHÍ ÍÁÇJÉÍ { { DÁ^æá^! } * c@É

RATINGS AND CHARACTERISTIC CURVES

FIG.1: FORWARD CURRENT DERATING CURVE

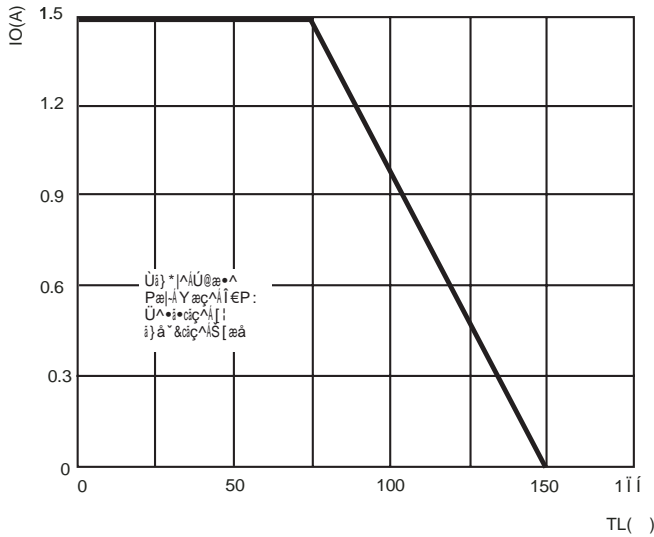


FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

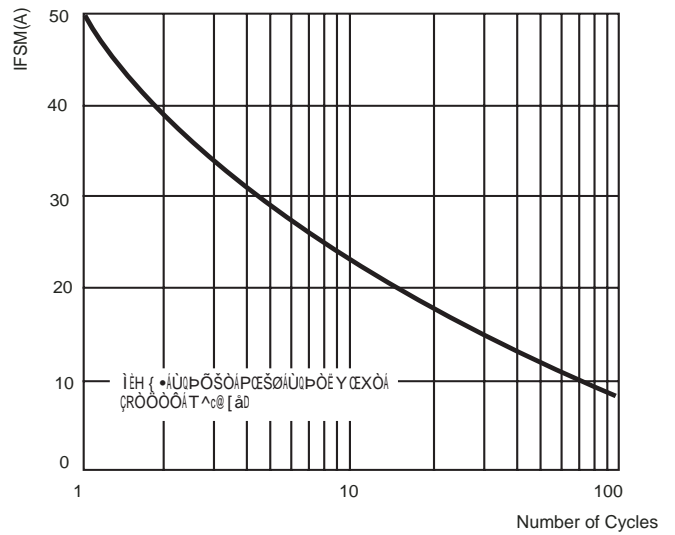


FIG.3: TYPICAL FORWARD CHARACTERISTICS

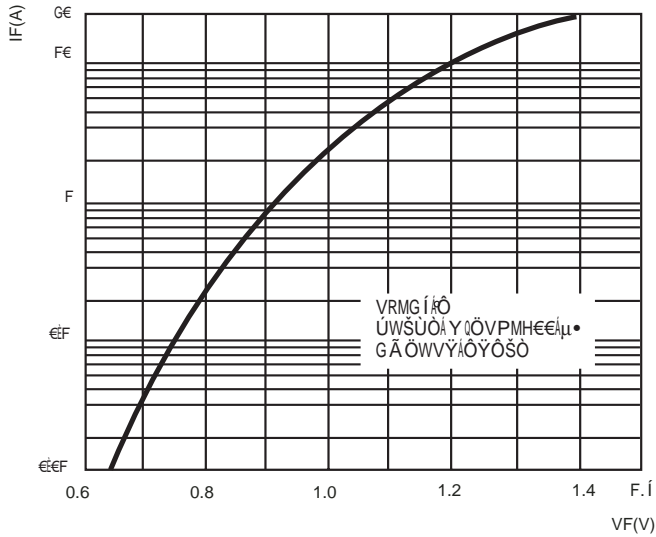


FIG.4 TYPICAL REVERSE CHARACTERISTICS

