


Unit: mm

RS3A~RS3M

SMA PLASTIC SILICON RECTIFIERS

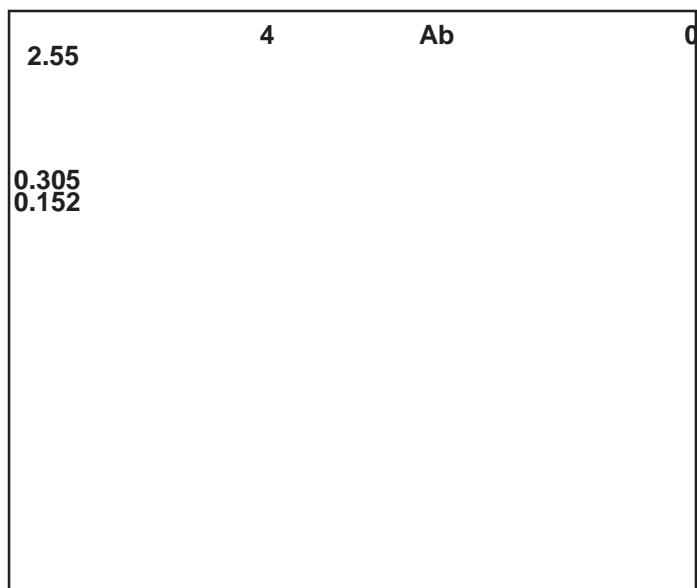

3MAX.


MAXIMUM RATINGS AND CHARACTERISTICS

f & \$ P E L H G W S H U D X X O R H W K H U Z R L W H G

RATINGS AND CHARACTERISTIC CURVES

* 7 & 3 " (80 3 8 " 33% 5 * " 8 6 3 3 & / 5

'*(' 038" 3 % 6 3 3 & % 3 " 5 * \$ 6 3 7 &

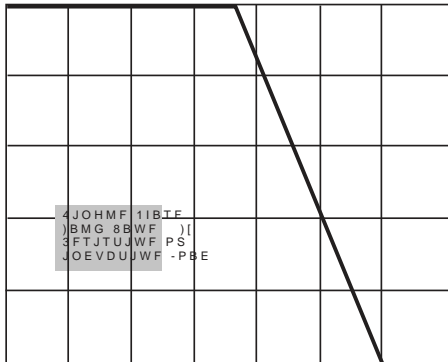


4JOHMF 11BIF
 8BMG 8BWF)(
 3FTJTUJWF PS
 JOEVDUJWF -PBE

".#*&/5 5&.1&863& \$

'*(. "9*.6. /0/ 3&1&5*7& 1&," "03/8
 463(& \$633&/5

b 1 & " , 0 3 8 " 34% 3 (8 6 3 3 & / 5

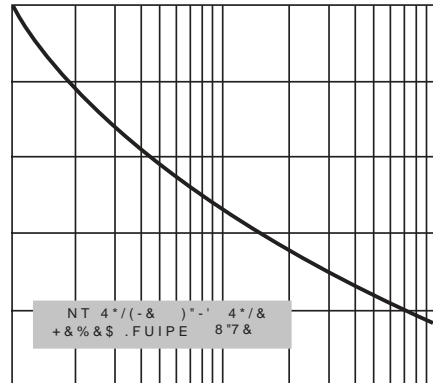


NT 4*/(-&)"- 4*/&
 +&%&\$.FUIPE 8'7&

/6.#&3 0' \$:-&45")]

*/4.5"/5"/&0.088"3%
 \$6.33&/5 .1&3&4

'*(5:1*\$"-*/45"/5"/&064 '033%
 \$) "3" \$5&3*45*\$4

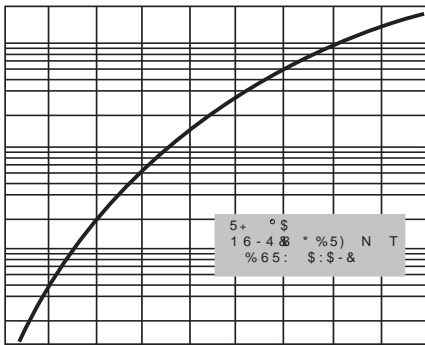


5+ ° \$
 16-48 *%5) N T
 %65: \$:-&

*/45"/5"/&064 '033% 70-0-& "(& 70-54

*/4.5"/5"/&0.088"3%
 \$6.33&/5 .1&3&4

'*(5:1*\$"- 3&7&34& \$)"3" \$5&3*45*\$4

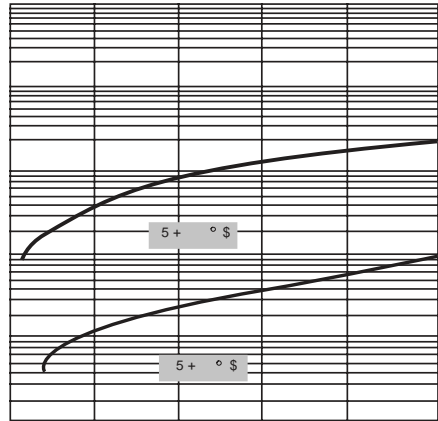


5+ ° \$

5+ ° \$

1&3\$&/5 0' 1&," 3&7&34&"/80-

+ 6 / \$ 5 * 0 7 1 " \$ * 5 " / 3 &

'*(5:1*\$"- +6/\$5*0/ \$"1"\$*5"/\$&

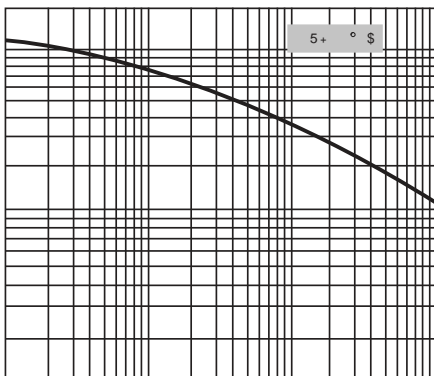


5+ ° \$

3&7&34& 750{& D-54

5 3 " / 4 * & 5 / 5 8 3 . " ± . 1 & % " / \$ &

'*(5:1*\$" 5 3 " / 4 * & 5 / 5 8 3 . " ± . 1 & % " / \$ &

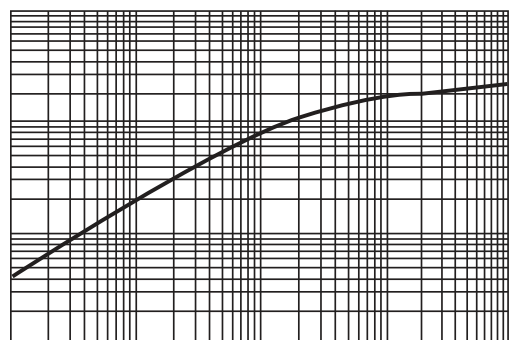

U 16-4& %63"5*0/ TFD