


SM \$ PLASTISILICON RECTIFIERS

)( \$ 7 8 5 ( 6  
 " 3 O D V W L F S D F N D J H K D V 8 Q G H U Z U L W H U V / D E R U D W R U \\  
 ") O D P P D E L O L W \ & O D V V L I L F D W L R Q 9  
 ") R U V X U I D F H P R X Q W D S S O L F D W L R Q V  
 "/ R Z S U R I L O H S D F N D J H  
 "% X L O W L Q V W U D L Q U H O L H I L G H D O I R U D X W R P D W H G S O D F H P H Q W  
 "\* O D V V S D V V L Y D W H G F K L S M X Q F W L R Q  
 "+ L J K W H P S H U D W X U H V R O G H U L Q J f &  
 0 ( & + \$ 1 , & \$ / ' \$ 7 \$  
 "& D V H - ( ' ( & 6 0 \$ ' 2 \$ & P R O G H G S O D V W L F E R G \ R Y H U  
 S D V V L Y D W H G F K L S  
 " 7 H U P L Q D O V 6 R O G H U S O D W H G V R O G H U D E O H S H U 0 / 6 7 '  
 0 H W K R G  
 " 3 R O D U L W \ & R O R U E D Q G G H Q R W H V F D W K R G 0 . 7 6 H Q G

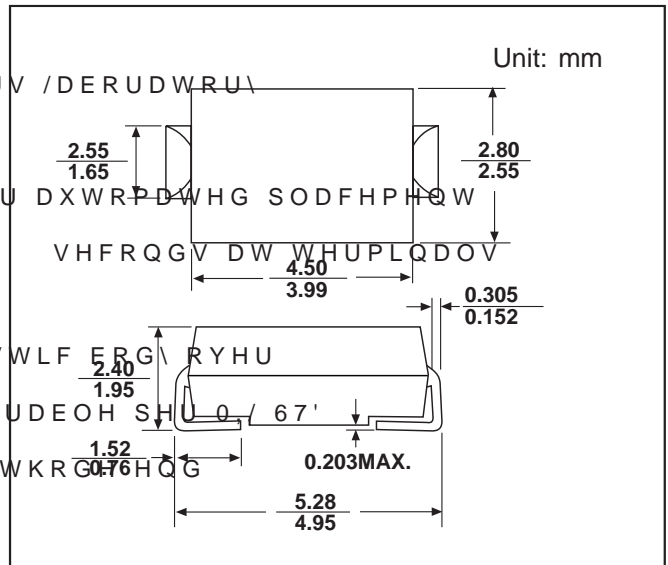

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

---

RATINGS AND CHARACTERISTIC CURVES