


DO-41 PLASTIC SILICON RECTIFIERS

) (\$ 7 8 5 (6
 ● 0 R O G F H D V H I H D W X W B M R U W L R Q
 ● + L J K F X U U H Q W F D S D „y u q c
 ● / R Z O H D N F X U H U H Q
 + L J K W H P S V H R O C W X W H Q J J X D U D Q W H H G
 C V H F P P O H D G Q J W K
 D W O E V W H Q V L R Q

 0 (& + \$ 1 , & \$ / ' \$ 7 \$
 ● & D V H ' 2 P R O G H G S O D V W L F
 ● 3 R O D U L W E W & C O C R R F W H K R G H
 ● 0 R X Q W L S R V W 0

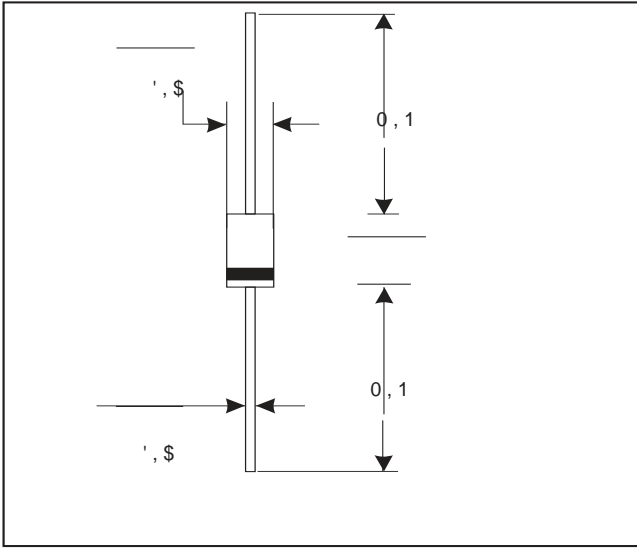

MAXIMUM RATINGS AND CHARACTERISTICS

f \$ P E L H G W S H U D X Q O R H W K H U Z L W H G

& + \$ 5 \$ & 7 (5 , 6 7 , & 6

6 < 0 % 2 /

(0

(0

(0

8 1 , 7

9_{5 5 0}

9

9_{5 0 6}

9

9_{· &}

9

,

\$

) 6 0

\$

9

&

C :

7_{6 7}

1 2 7 (0 H D V X U H G D W 0 +] D Q G D S S L H G U H Y H U V H Y R O W D J H R I 9 ' &

7 K H U P D O 5 H V L V W D Q F H I U R P - X Q F W L R Q R I D R E L B C W E R D U G P R X Q W H G I D G H Q J W

RATINGS AND CHARACTERISTIC CURVES

FIG.1: I_o-T_c Curve

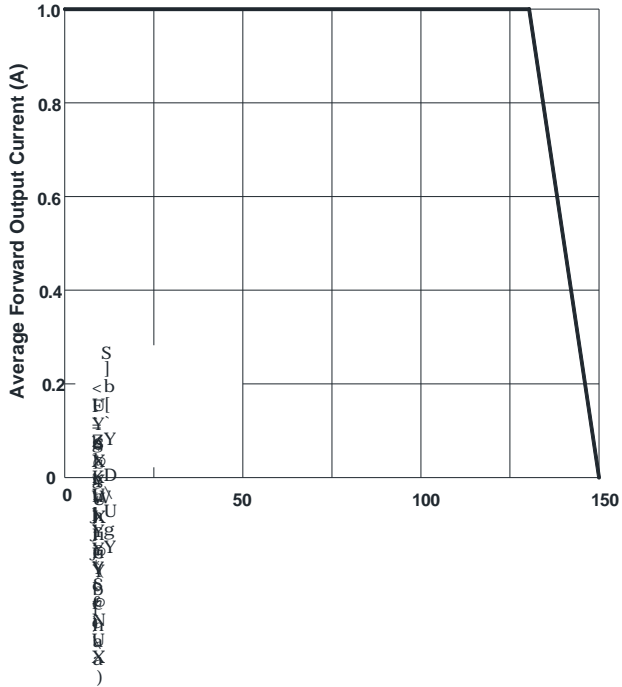


FIG.2: Forward Surge Current Capability

