



junction, majority carrier conduction
ounted applications
ss, high efficiency
surge current capability
w voltage, high frequency inverters,
, and polarity protection applications

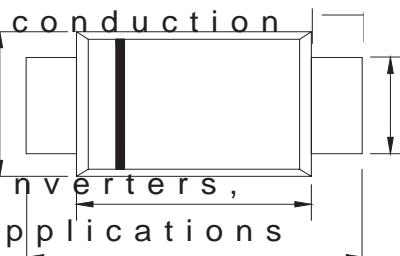


' \$ 7 \$

G H G S O D V W L F E R G \
W L R Q D Q \

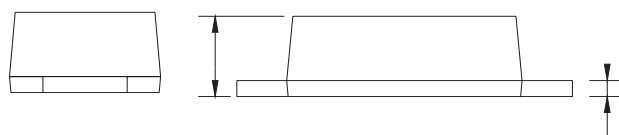

. w . : . w . w . w . w . :



1 MHz and applied reverse voltage of 4 V D.C.
ed with 2.0" X 2.0" (5 X 5 cm) copper pad areas

Fig.1 Forward Current Derating Curve

